

▶ THE FUTURE IS NOW



GO-SCAN 4335

Portable Digital Radiography Detector



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group

Enter into the new world of digital inspection



BATTERY OPERATED



IP 65



WIRELESS OR CABLE




ASI TECHNOLOGY




PLUG & PLAY



RUGGEDIZED



STATE-OF-THE-ART IMAGE EDITING SOFTWARE



FULLY INTEGRATED

FEATURES


	Unit	GO-SCAN 4335
GENERAL		
Technology	-	aSi
Pixel pitch	µm	154
Active area	mm/in	433.7 x 354.8 / 16.9 x 13.8
Active resolution	pxl	2816 x 2304
BANDWIDTH		
Data interface	-	GigE & Wi-Fi
ADC conversion	bits	16
POWER CONSUMPTION		
Power consumption	W (standing/operating)	< 8 / 20
INTEGRATION		
Overall dimension	mm/in	464 x 388 x 188 / 18.26 x 15.27 x 7.4
Overall weight (without sleeve)	Kg/lbs	5.9 / 13
ENVIRONMENTAL		
Waterproof level	-	IP65
Drop test	m/in	1/39
Operating temperature	°C/F°	-20, 50°C / -4, +122°F
Storage temperature	°C/F°	-20, 50°C / -4, +140°F
Humidity	% R.H.	30 to 75
Life span	Gy/k rem	1000 / 100

SHERLOCK NDT SOFTWARE



Image editing	Smart measurement tool
ADRC dynamic filter	SNR
Local contrast enhancement	Greyscale feature
Teledyne filter	iSRb
Histogram equalization	Annotation / Highlight
Emboss	Mirroring / Rotation
Black & white	Auto IQI
Pseudo-colours	Pixel map edition

DRAWINGS

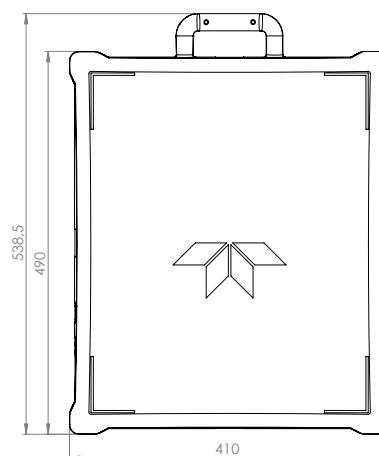

ACCESSORIES



FIXTURING BAR



LATERAL FEET



POWER/COM CABLE

All specifications are non contractual and subject to change without prior notice.

TELEDYNE ICM

Zoning Les Plenesses / Rue Du Progrès 3 / B-4821 Andrimont (Dison) - Belgium
+32 (0)87 44 01 50 / icm.sales@teledyne.com



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group